Distributed by:

JAMECO® ELECTRONICS

**www.Jameco.com ✦ 1-800-831-4242**

The content and copyrights of the attached material are the property of its owner.

| CUST. NAME | N0037 | DATE | JUN.06,02' |
|---|---|---|---|
| DESCRIPTION | Toroidal Coil Inductors | TYPE | |
| GS PART NO. | GSTCV6852A-125uH | DWG. NO. | 015503 |
| CUST. PART NO. | 542-5703 | CUST. DWG. NO. | |

| DIM | Unit in mm |
|---|---|
| A | 22.22(max) |
| B | 11.09(max) |
| C | 15.0+1.0 |
| D | 0.8 ±0.05 |
| E | |
| F | |
| G | |
| H | |
| I | |
| J | |
| K | |
| L | |
| M | |
| N | |

MECHANICAL MEASUREMENTS

Jameco Part Number 208274

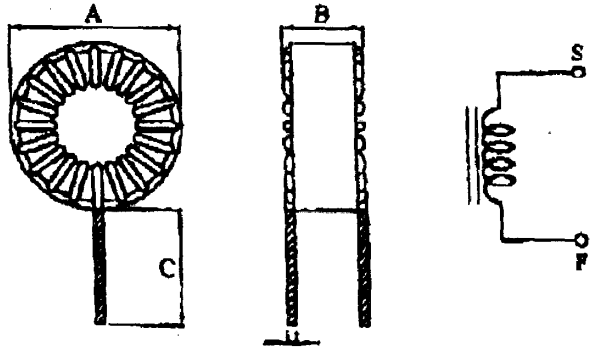


C:TINNED.

ELECTRICAL MEASUREMENTS & TEST EQUIPMENT

| NO. | L (uH) @1KHz/0.25V | L (uH) +IDC @1KHz/0.25V | SRF(min) MHz | RDC(max) (Ω) | IDC(max) (A) |
|---|---|---|---|---|---|
| EQU. | CH-101 | CH-101 CH 1320 | HM 9460 | GOM-801G | CH 1320 |
| SPE. | 125±10% | 70.0(min) | | 0.046 | 2.75 |
| 1 | 126.5 | 93.1 | | 0.038 | |
| 2 | 124.7 | 92.9 | | 0.039 | |
| 3 | 125.9 | 93.0 | | 0.039 | |
| 4 | 126.0 | 93.2 | | 0.038 | |
| 5 | 124.9 | 92.7 | | 0.038 | |
| 6 | | | | | |
| 7 | | | | | |
| 8 | | | | | |
| 9 | | | | | |
| 10 | | | | | |

Remark :

CT39(OR EQUL)
CORE: T68-52A
WIRE: 0.8 $\phi$ 2UEW NY
TURN: 48Ts(IN,REF.)
耐熱膠布：6mmx125mm.
※ VARNISH.

DRAW BY: 吳靖芳 6/7'02

CHECKED BY: 6/7'02

APPROVED BY: 6/7'02

資料 JUN 07 '02 管制